



WWW.BCFAB.COM


## 1977-1984 CADILLAC REAR BRACKETS

**1.** Raise the vehicle to a safe and comfortable working height, and support the rear axle. Remove the coil spring, refer to your the service manual for disassembly procedure.

**2.** Apply Teflon tape to the air fitting and thread it into the airbag.

**3.** Attach the Upper Cup and Lower Plate to the airbag. The Upper Cup air port and the taller side of the Lower Plate should face the rear of the vehicle when installed. See (IMG 04). Screw in the all thread to the Upper Cup and insert air line into the air fitting.

**4.** Slide the airbag assembly into the upper spring pocket. Place the large slide washer ON TOP of the spring pocket, then install the small washer and Nylock nut to secure the airbag assembly.

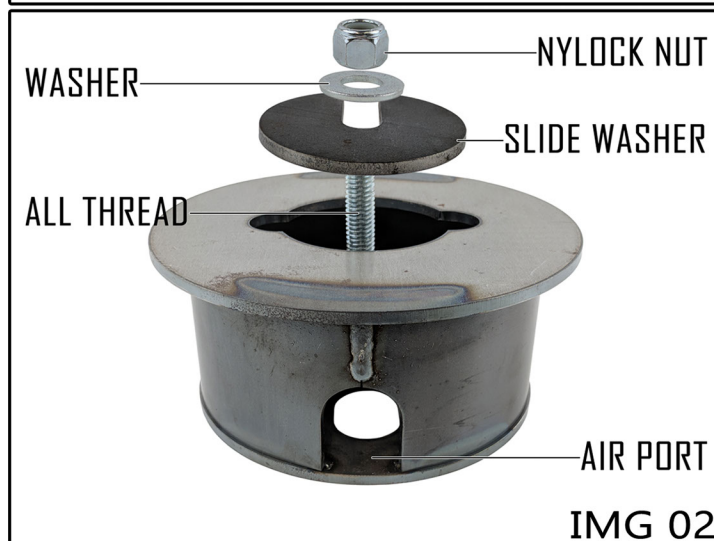



WWW.BCFAB.COM

## 1977-1984 CADILLAC REAR BRACKETS

**5.** Tack the lower plate to lower spring perch. Then re-attach shocks.

**6.** Double check that all mounting hardware and rear suspension is secure and that the airbag has sufficient clearance. Make sure the exhaust is at least 4-5 inches away from the airbag. Test drive the vehicle.

**7.** Re-check airbag fitment, RUBBING WILL RESULT IN AIRBAG FAILURE! This is a non-warrantable issue.

TALLER SIDE FACES REAR OF VEHICLE

TALL SIDE

SHORT SIDE



IMG 04



IMG 05



IMG 06