



1963-1965 RIVIERA REAR BRACKETS

1. Raise and support the vehicle to a safe and comfortable working height. Remove the rear coil springs, refer to your service manual for disassembly procedure. With the coil springs removed, install the upper spring retainers. Use the center hole (IMG 02) and factory upper spring pocket stud & nut.

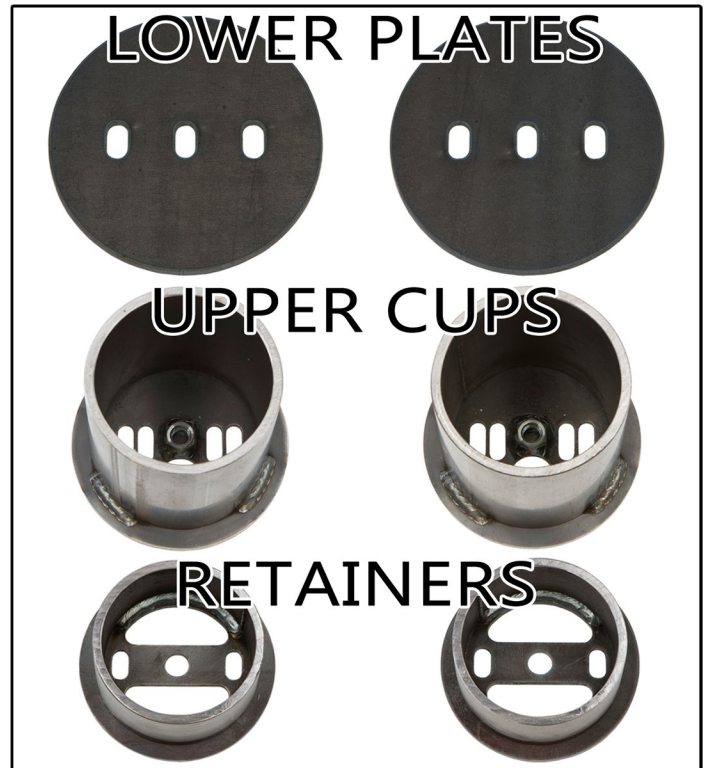

2. Install the air fitting onto the airbag, then bolt the airbag to the upper cup bracket. (Img 03)

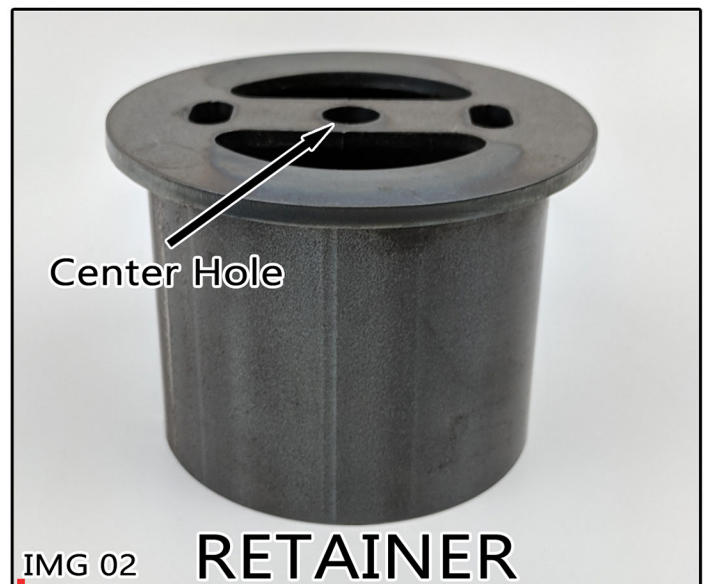

1963-1965 RIVIERA REAR BRACKETS

3. Use the provided hardware to bolt the airbag to the lower trailing arm (the lower plate is sandwiched between the airbag and lower trailing arm).



IMG 03

4. Attach the air line to the airbag, then feed the air line through the upper retainer while sliding the upper cup over the retainer. (IMG 04)

5. Re-attach shocks and cycle suspension to check for clearance.



IMG 04