


REAR COIL SPRING AIRBAG BRACKETS

1. Raise and support the vehicle at a safe and comfortable working height. If you have a large hole in the coil spring retainer you will need to place the large upper washer on top of the frame to attach the upper cup bracket.

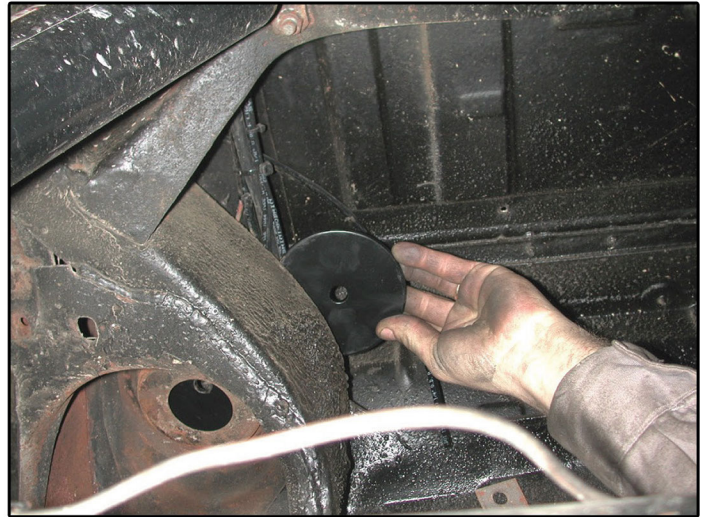

2. Next drill a hole in the upper coil spring pocket to route the air line through. Remove all burrs and use a rubber grommet.

3. Apply Teflon tape to the air fitting, and screw into air spring. Next bolt airbag to upper bracket.



4. Place the airbag assembly into the coil spring pocket with stud protruding through upper washer. The air line must be routed at this time. Secure with a nut.

5. Bolt the airbag to lower circle plate. Tack weld lower plate onto factory spring mount.

